



Never compromise on quality!



INSTANT POT HOLE REPAIRER

Cold Lay, Asphalt Repair Compound



DRIVE ALIVE RANGE

Description:

A cold lay asphalt concrete pot hole repair compound for use on roads, pavements and car parks.

Benefits:

- ◆ Used in wet, freezing and hot conditions.
- ◆ No special preparation required.
- ◆ Instant trafficking.
- ◆ Recyclable packaging.
- ◆ Compatible with flexible road surfaces.
- ◆ Solvent-free.
- ◆ Ready to use – No need to add water.
- ◆ Polished stone value 60 psv.
- ◆ Absolutely no waste.
- ◆ Environmentally friendly – No CO₂ gases.

Uses

A suitable solution for roads, pavements, driveways and car parks. The product can be trafficked instantly in wet, freezing and hot conditions and at the same time is compatible with the existing road surface. **PERMANENT POT HOLE REPAIRER** can be applied at depths up to 100mm. (Greater depths can be achieved by applying the layer-on-layer method).

Application

PERMANENT POT HOLE REPAIRER has high skid resistance due to the specially formulated bitumen and interlocking aggregate. Pot hole repairs can be achieved at any depth.

1. Ensure pothole is free of debris and standing water.
2. Fill the pothole straight from the tub.
3. Apply slightly proud of the pothole.
4. Tamp down to compact material to complete the application.

Coverage

1m² x 15mm (compacted).

Container Size

25Kg plastic tubs.

Colour

Black aggregate.

Shelf Life

6 months from date of manufacture when stored in sealed tubs.

Storage Conditions

Store in a cool and well-ventilated place.


Disposal of Containers

Do not leave empty containers where residue could be harmful to children, animals or the environment. Replace lids and remove any containers to a central disposal point in accordance with local regulations.

Health & Safety

Please refer to separate material safety data sheet for full handling, use and storage instructions. Keep out of reach of children. It is the users responsibility to determine suitability for use. If in doubt contact our Technical Department for advice.

Note: this information is for general guidance only, since site conditions and labour are beyond our control. It is recommended that users make their own tests to determine suitability.

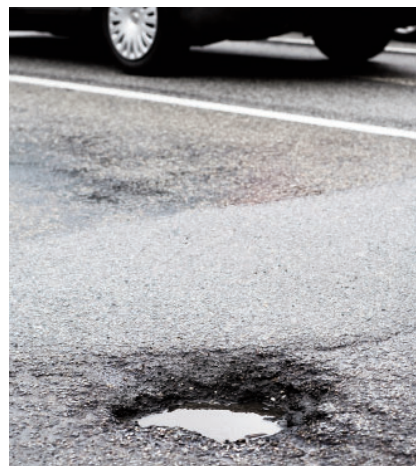

Specification Summary

Appearance	Black aggregate
Solubility In Water	Non soluble
Flammability	Non-flammable

Product Details:

Code:	BDPHR25
Colour:	Black
Size:	25Kg
Barcode:	5060021369093



Part of the Bond It Drive Alive Range

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties rights and, if necessary clarifying the position.

Recommendations for use do not constitute a warranty, either expressed or implied, of the fitness or suitability of the products for a particular purpose.



Certificate Number:
6152
ISO 9001; ISO 14001;
ISO 45001

BOND IT
*Head Office: Unit G16 River Bank Way, Lowfields Business Park,
Elland, West Yorkshire HX5 9DN.
Telephone: +44 (0)1422 315300 Fax +44 (0)1422 315310
Email: salesuk@bonditgroup.com Website: www.bonditgroup.com*



V1 06/11/14
Supercedes: V1